



**ZASTAVA
KAMIONI**



New Turbo Rival 4x4








ZASTAVA KAMIONI

ZASTAVA KAMIONI d.o.o, Kragujevac
- u restrukturiranju
Kosovska 4 · 34000 Kragujevac · Republika Srbija
tel: ++381 34 336 160 · fax: ++381 34 335 319
e-mail: prodaja@zastava-kamioni.co.rs
www.zastava-kamioni.co.rs



New TurboRival 4x4

TIP I VRSTA MOTORA	EURO 3	SOFIM 8140.43 S - Dizel, četiri takta sa direktnim ubrzgavanjem goriva, (COMMON RAIL)
RADNA ZAPREMINA (cm ³)		2800
MAKSIMALNA SNAGA PRI 3600 o/min.		92 kW / 125 KS
MAKSIMALNI OBRтни MOMENT PRI 1800 o/min.		290 Nm
VRSTA HLAĐENJA		VODENO
SPOJNICA		Suva sa jednim diskom I mehaničkom komandom od 10 1/2"
MENJAČ		IVECO 2826.5 Mehanički sa 5 sinhronizovanih stepena prenosa napred I hodom nazad
KOČNICA		Hidraulična servokočnica sa ABS-om, depresorom i dva nezavisna kruga, napred disk, pozadi doboš kočnica
UPRAVLJAČ		Hidraulički sa servo dejstvom

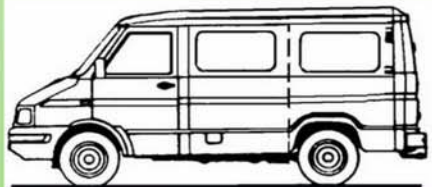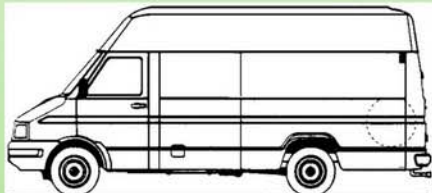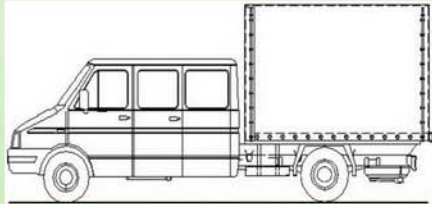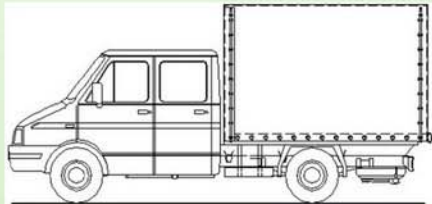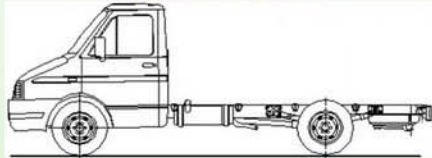

TEHNIČKI PODACI	ŠASIJA SA KABINOM		ŠASIJA SA PRODUŽENOM KABINOM				KAMION		KAMION SA PRODUŽENOM KABINOM				FURGON		FURGON SA POD. KROVOM		KOMBI 8+1
	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H
modeli	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H	40.12H	35.12H
PNEUMATICI	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16	185/75 R16	215/75 R16
OSNO RASTOJANJE (mm)	3310		3310		3310		3310		3310		3310		2800		2800		2800
DUŽINA VOZILA (mm)	5740		5740		5740		5780		5915		5980		4815		4815		4815
ŠIRINA VOZILA (mm)	2000		2000		2000		2140		2140		2140		2000		2000		2000
VISINA VOZILA (mm)	2200		2200		2200		2200		2200		2200		2460		2820		2380
UNUTRAŠNJA DUŽINA TOV. SANDUKA / PROSTORA (mm)							3493		2801		2140		2463		2463		
UN.ŠIRINA TOV. SANDUKA/PROSTORA (mm)							2073		2073		2073		1820		1820		
VISINA TOV. SANDUKA / PROSTORA (mm)							400		400		400		1512		1885		
ZAPREMINA TOVARNOG PROSTORA (m³)													6,7	9,9	8,4	12,4	
VISINA PODA VOZILA OD TLA (mm)	850		850		850		1100		1100		1100		790		790		790
KORISNA NOSIVOST (kg)	1480	2090	1290	1960	1160	1830	1240	1910	1110	1780	1020	1720	1200		1220		8 putnika +380
DOZVOLJENA UKUPNA MASA (kg)	3500	4200	3500	4200	3500	4200	3500	4200	3500	4200	3500	4200	3500	4200	3500	4200	3500
MAKSIMALNA BRZINA (km/h)	102		102		102		102		102		102		102		102		102
ZAPREMINA REZERVOARA ZA GORIVO (l)	70		70		70		70		70		70		70		70		70
SAVLADIVANJE MAKSIMALNOG USPONA (%)	45		45		45		45		45		45		45		45		45

U OKVIRU POLITIKE UNAPREDJENJA PROIZVODA ZASTAVA KAMIONI MOGU BEZ PREDHODNOG OBAVEŠTENJA IZMENITI TEHNIČKE KARAKTERISTIKE.